

LP962-XXX-5XC - IEC CERTIFIED (IECEX), LOOP POWER SENSOR, ACCELERATION, 4-20 MA, TOP EXIT CONNECTOR / CABLE LOW CAPACITANCE

LP962-XXX-5XC - IEC sertifioitu (IECEX) Loop Power kiihtyvyyssanturi, 4-20 mA, liitin/kaapeli päällä, alhainen kapasitanssi

MSP_VIRTUEMA	CTC
RT_MANUFACTURER	
MSP_VIRTUEMA	LP962-XXX-5XC
RT_SKU:	
Tyyppi:	1-akselinen Teollisuus Sovellukset: Atex Zone 0
Sovellukset:	Condition Monitoring
Tyyppi:	4-20 mA

Saatavissa 2 eri kokoonpanoa:

- 1/4 inch NPT Mount LP962-XXX-51C
- 1/2 inch NPT Mount LP962-XXX-52C




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

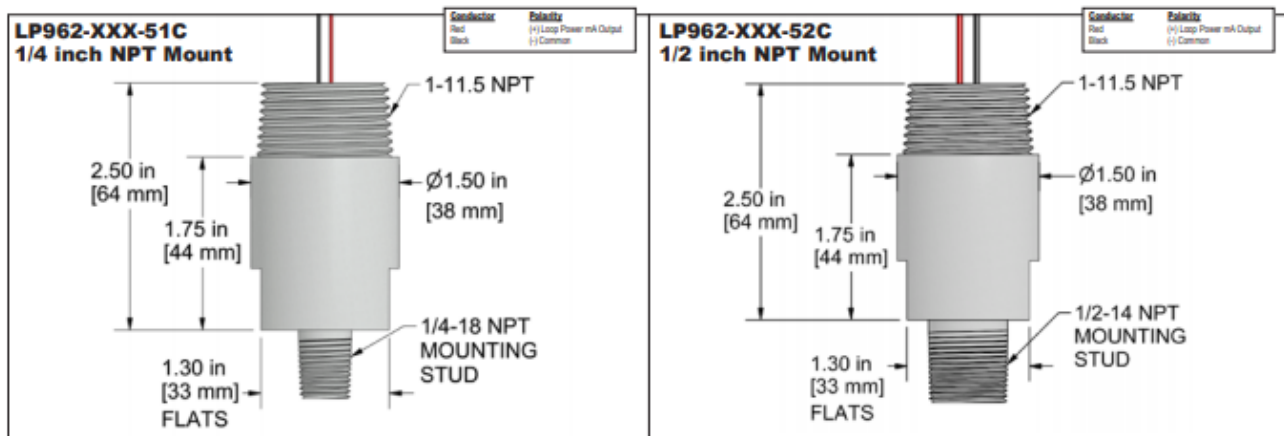

MSP_VIRTUEMART_TechDETAILS

- Output: 4-20 mA
- Power Requirements (Loop Powered) Voltage Source: 12-28 VDC
- Temperature Range: -40 to 176°F
- Case Material: 316L Stainless Steel
- IECEx Certification
- Connector: Flying Leads

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/6_pro_lp962-5xc_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/6_pro_lp962-5xc_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ