

METRIX MX2031-SARJAN JATKOKAAPELI

MX2030-sarjan laitteille ja antureille.

MSP_VIRTUEMA Metrix
RT_MANUFACTURER

MSP_VIRTUEMA MX2031
RT_SKU:

Yhteensopiva MX2030 ja Bently Nevada 3300/3300XL 5 ja 8 mm antureiden kanssa.

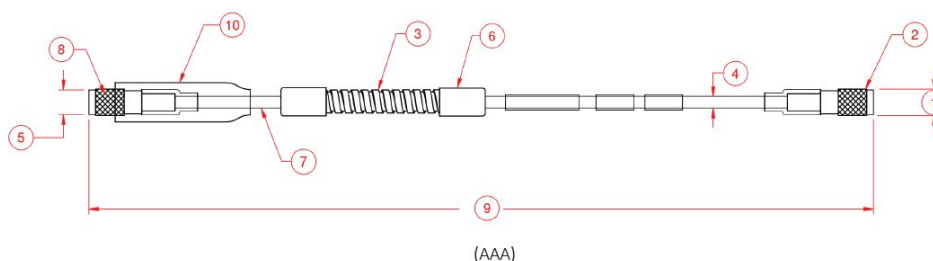


FIGURE 3: MX2031 Extension Cable

NOTES:

- | | |
|---|---|
| <ol style="list-style-type: none"> 1. 6.86mm (0.270") max. outside diameter. 2. Miniature male coaxial connector, round, knurled. 3. Optional cable protective armor (option BB=01) – 6.99mm (0.275") max. outside diameter. Armor length is 305mm (12.0") less than cable length. Armor material is 304 stainless steel. 4. 75Ω cable – 2.79mm (0.110") max. outside diameter. 5. 6.86mm (0.270") max. outside diameter. 6. Armor ferrule is 303 stainless steel. 8.89mm (0.350") max. outside diameter. | <ol style="list-style-type: none"> 7. Ethylene-tetrafluoroethylene (ETFE) insulated coaxial cable. 8. Miniature female coaxial connector, round, knurled. 9. Total length (option AAA), + 25%, -0%. 10. Fluorosilicone connector insulator boot. 13mm (0.51") max. outside diameter 50mm (2.00") max. length. Insulator boot is not designed to seal against moisture ingress. It is provided for electrical insulation of connectors from inadvertent contact with conduit, junction boxes, and other metal objects. |
|---|---|

MSP_VIRTUEMART_PRODDOCS

1. [Esite ja tuotevaihtoehdot](http://www.mip.fi/images/docs/fi/MX2031.pdf), (URL: <http://www.mip.fi/images/docs/fi/MX2031.pdf>)



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ