

TA131 - DUAL OUTPUT HIGH G ACCELEROMETER, TEMPERATURE / ACCELERATION TOP EXIT CONNECTOR / CABLE, 10 MV/G, 10 MV/°C

TA131 - Dual Output High g, lämpötila ja kiihtyvyys, liitin / kaapeli päällä, 10 mV/g, 10 mV/°C

MSP_VIRTUEMA CTC
RT_MANUFACT
URER

MSP_VIRTUEMA TA131
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanoa:

- 3 Pin Connector TA131-1D
- Integroidulla kaapelilla TA131-2D
- Integroidulla suojatulla kaapelilla TA131-3D




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

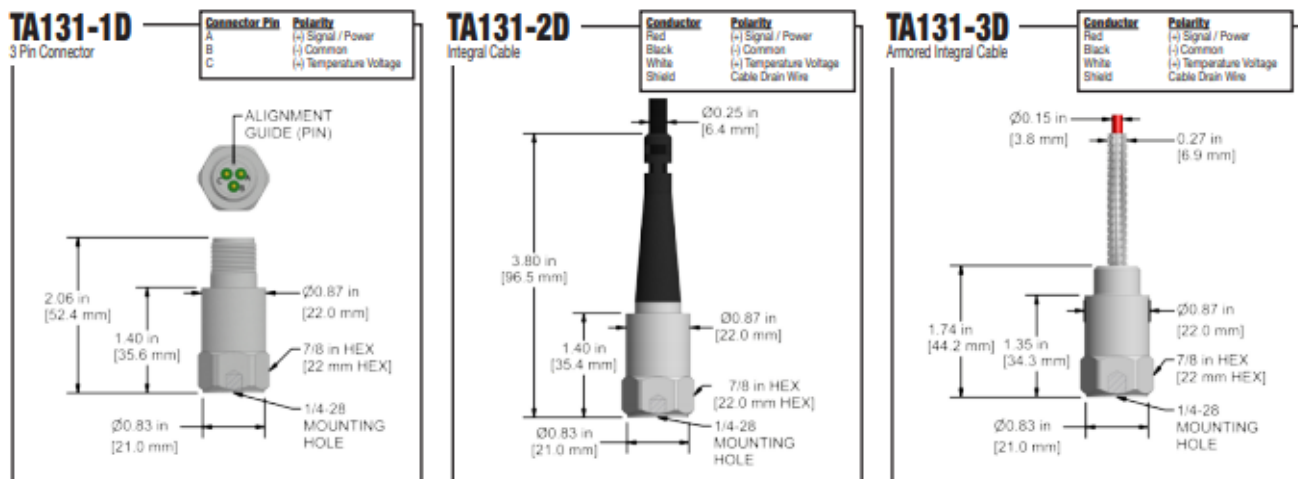

MSP_VIRTUEMART_TECHDETAILS

- Temperature **Measurement** Range: 37° to 250° F (3° to 121°C)
- Temperature Output: 10 mV/°C
- Frequency Response (±3dB): 60-750,000 CPM (1,0-12500 Hz)
- Dynamic Range: ± 500 g, peak
- Sensitivity (±10%): 10 mV/g
- Case Material: 316L Stainless Steel
- Enviromental Temperature Range: -40 to 250°F

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ta131_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ta131_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ