

# TA134 - DUAL OUTPUT SENSOR, ACCELERATION/TEMPERATURE, SIDE EXIT CONNECTOR, 500 MV/G, 10 MV/°C

TA134 - Dual Output , lämpötila ja kiihtyvyys, liitin / kaapeli sivulla, 500 mV/g, 10 mV/°C

MSP\_VIRTUEMA CTC  
RT\_MANUFACTURER




MSP\_VIRTUEMA TA134  
RT\_SKU:

Tyyppi: 1-akselinen  
Teollisuus

Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanoa:

- 3 Pin Connector TA134-1D
- Integroidulla kaapelilla TA134-2D
- Integroidulla suojatulla kaapelilla TA134-3D

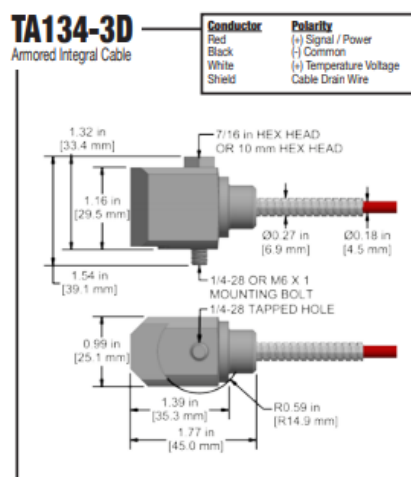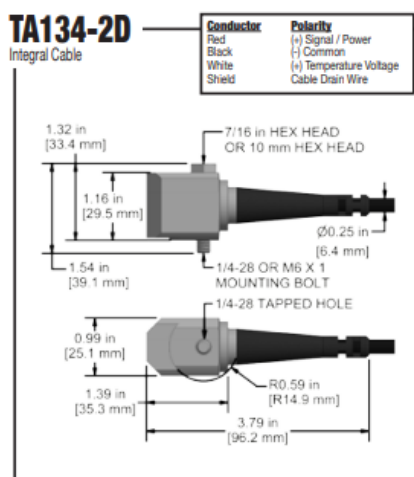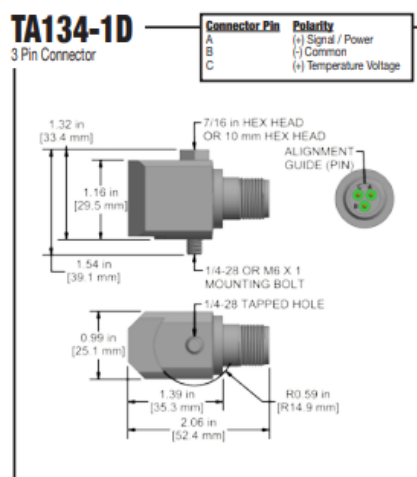

[www.facebook.com/mipelectronics](https://www.facebook.com/mipelectronics)



[www.linkedin.com/company/mip-electronics-ltd/](https://www.linkedin.com/company/mip-electronics-ltd/)



[www.youtube.com/channel/UCpKEF\\_7bS4dMC4qPokUAgDQ](https://www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ)

## MSP\_VIRTUEMART\_TECHDETAILS

- Temperature **Measurement** Range: 37° to 250° F ( 3° to 121°C)
- Temperature Output: 10 mV/°C
- Frequency Response ( $\pm 3$ dB): 6-480,000 CPM (0,1-8000 Hz)
- Dynamic Range:  $\pm 10$  g, peak
- Sensitivity ( $\pm 10\%$ ): 500 mV/g
- Case Material: 316L Stainless Steel
- Enviromental Temperature Range: -40 to 250°F

## MSP\_VIRTUEMART\_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ta134_ds.pdf) , (URL: [http://www.mip.fi/images/docs/fi/1\\_vs\\_ta134\\_ds.pdf](http://www.mip.fi/images/docs/fi/1_vs_ta134_ds.pdf))

## MSP\_VIRTUEMART\_PRODUCT\_IMAGE\_TITLE



[www.facebook.com/mipelectronics](https://www.facebook.com/mipelectronics)



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd-/)



[www.youtube.com/channel/UCpKEF\\_7bS4dMC4qPokUAgDQ](https://www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ)



[www.facebook.com/mipelectronics](https://www.facebook.com/mipelectronics)



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd-/)



[www.youtube.com/channel/UCpKEF\\_7bS4dMC4qPokUAgDQ](https://www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ)