

AC923 Series

Class I, Division 2/Zone 2 Accelerometer, For Use In "Non-Arcing, Non-Sparking" Environments, Top Exit Connector/Cable, 50 mV/g

SECTION 1 - VIBRATION SENSORS
Class 1, Division 2/ Zone 2 Accelerometers

Actual
Product
Size Shown






Must Use "Class I, Division 2"
CB190 or CB206 Cable and D2Q Connectors

Product Features

Class I, Division 2/Zone 2 Rating

Excellent for Higher g Applications

- ± 100 g, Peak Dynamic Range
- 50 mV/g, $\pm 10\%$ Sensitivity
- 1,0 - 15000 Hz (60 - 900,000 CPM) Frequency Response

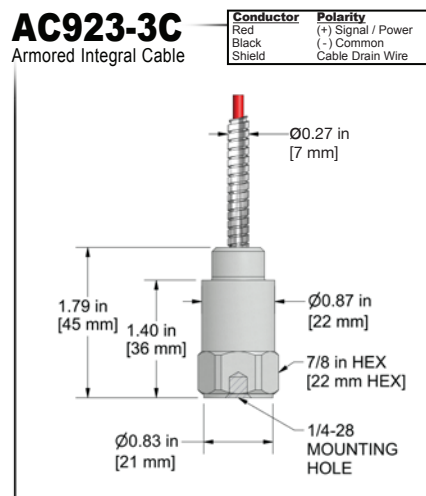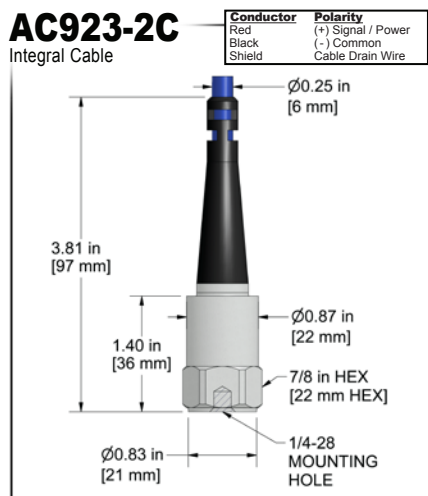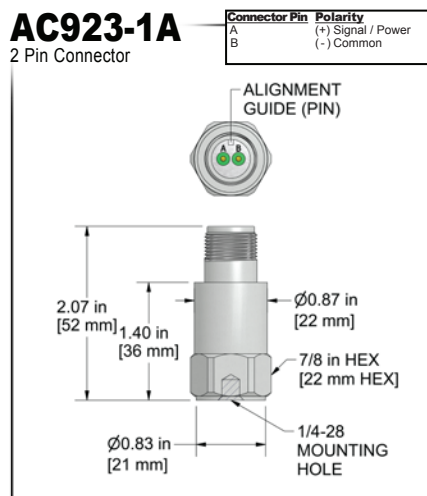

Specifications	Standard	Metric
Part Number	AC923	M/AC923
Sensitivity (±10%)	50 mV/g	
Frequency Response (±3dB)	60-900,000 CPM	1,0-15000 Hz
Frequency Response (±10%)	120-300,000 CPM	2,0-5000 Hz
Dynamic Range	± 100 g, peak	
Electrical		
Settling Time	<3 Seconds	
Voltage Source (IEPE)	18-28 VDC	
Constant Current Excitation	2-10 mA	
Spectral Noise @ 10 Hz	9 µg/√Hz	
Spectral Noise @ 100 Hz	2 µg/√Hz	
Spectral Noise @ 1000 Hz	1.6 µg/√Hz	
Output Impedance	<100 ohm	
Bias Output Voltage	10-14 VDC	
Case Isolation	>10 ⁸ ohm	

Specifications	Standard	Metric
Environmental		
Temperature Range	-58 to 250°F	-50 to 121°C
Maximum Shock Protection	5,000 g, peak	
Electromagnetic Sensitivity	CE	
Sealing	IP68	
Physical		
Sensing Element	PZT Ceramic	
Sensing Structure	Shear Mode	
Weight	3.2 oz	90 grams
Case Material	316L Stainless Steel	
Mounting	1/4-28	
Connector (non-integral)	2 Pin MIL-C-5015	
Resonant Frequency	1,380,000 CPM	23000 Hz
Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
Mounting Hardware	1/4-28 Stud	M6x1 Adapter Stud
Calibration Certificate	CA10	

Ordering Information

Standard	AC923-1A (1/4-28 Stud)	AC923-2C - / (1/4-28 Stud)	AC923-3C - / (1/4-28 Stud)
Metric	M/AC923-1A (M6x1 Adapter Stud)	M/AC923-2C - / (M6x1 Adapter Stud)	M/AC923-3C - / (M6x1 Adapter Stud)

Cable Termination Options: L Z

Read Before Purchasing
Important information on
Regulatory Approvals and Requirements
on Page 64

Backed by our Unconditional Lifetime Warranty

www.ctconline.com

