Actual Product

 $\epsilon$ 


## Low Voltage Accelerometer, Side Exit Connector/Cable, 100 mV/g





## **Product Features**

**Ultra Low Power Sensor For Battery Powered Wireless** Transmission Systems

- 3 Pin MIL Connector
- Supply Voltage 4-6 Volts
- Compatible with Many Wireless Transmission Systems

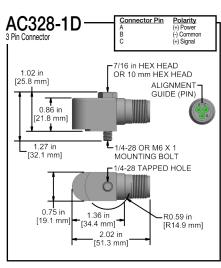

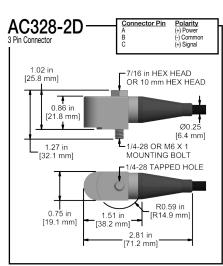


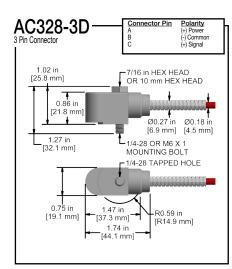

Specifications	Standard	Metric
Part Number	AC328	M/AC328
<u>Vibration</u>		
Sensitivity (±10%)	100 mV/g	
Frequency Response (±3dB) Frequency Response (±10%)	30-600,000 CPM 60-480,000 CPM	0,5-10000 Hz 1,0-8000 Hz
Dynamic Range	± 15 g, peak	
Electrical		
Settling Time	<1.0 second	
Power Supply Voltage	4-6 VDC (10%)	
Spectral Noise @ 10 Hz	60 μg/√Hz	
Spectral Noise @ 100 Hz	20 μg/√Hz	
Spectral Noise @ 1000 Hz	5 μg/√Hz	
Output Impedance	<100 ohm	
Bias Output Voltage	2.5 V ± 10%	
Case Isolation	>10 <sup>8</sup> ohm	
Supply Current	< 20 μA	

Specifications	Standard	Metric
Environmental		
Temperature Range	-58 to 250°F	-50 to 121°C
Maximum Shock Protection	5,000 g, peak	
Sealing	Welded, Hermetic	
Physical		
Sensing Element	PZT Ceramic	
Sensing Structure	Shear Mode	
Weight	3.3 oz	93 grams
Case Material	316L Stainless Steel	
Mounting	1/4-28	
Connector (non-integral)	3 Pin MIL-C-5015	
Resonant Frequency	1,200,000 CPM	23000 Hz
Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
Calibration Certificate	CA10	

## **Ordering Information**

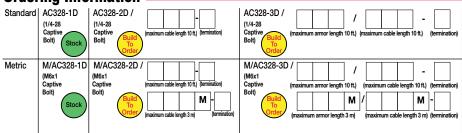

Cable	L Z
-------	-----

